





Narrow Lane

RAMS014-CEN

Document Owner (QHSE Manager)	Steve Usher	 2026
Checked & Approved (Technical Manager)	Phil Thompson	
Approved for Use	15/01/2026	

Issue Date	15/01/2026
Next Review Date	31/12/2026

Version	Date	Name	Details
1	15/01/2026	Phil Thompson	New draft

Note Under no circumstances is this document to be modified in any way without the QHSE Managers consent. Uncontrolled when Printed or Downloaded

1 Document Summary

- 1.1 This generic RAMS document covers the installation, operation and collection of temporary traffic control by use of Narrow Lanes.
- 1.2 This document has been put together using guidelines set out in the following documents.
 - Safety at Street Works and Road Works
 - Traffic Signs Manual Chapter 8 Part 1 2009
 - National Highways Sector Schemes 12D
- 1.3 It applies to all highways and roads, except motorways and any dual carriageways, with a speed limit of 50 mph or more. This Code applies to works carried out by or on behalf of both highway authorities and statutory undertakers.
- 1.4 Local highway authorities have a statutory duty to co-ordinate all works in the streets for which they are responsible. Similarly, Undertakers have a statutory duty to co-operate with the highway authority and with other undertakers.
- 1.5 Liaison with the highway authority and other authorities or statutory bodies may be required in planning the works to obtain any necessary licences, approvals and temporary traffic regulation orders/notices in advance of the works commencing. No works are to be installed without the relevant licences and approvals in place.

Note Highway authority permission needed. Signing as per Safety at Street Works and Road Works A Code of Practice 2013 2nd impression (with amendments), June 2014 page 65 Consult your supervisor, manager or other competent person if at or near a railway level crossing. See also Safety at Street Works and Road Works A Code of Practice 2013 2nd impression (with amendments), June 2014 pages 77 to 80.

- 1.6 No works are to be installed without the relevant licences and approvals in place.
- 1.7 A Task Briefing will be given for all works, detailing any site-specific information relevant to the specific works being undertaken.
- 1.8 If any risks, operational or environmental, are identified when carrying out the on site-specific risk assessment that compromises safety you **MUST** inform the Contract Manager immediately and prior to the deployment of any traffic management equipment.
- 1.9 If at any point throughout your work, you encounter an unsafe situation you **MUST** stop work and contact your manager or supervisor immediately for guidance.
- 1.10 All Incidents, Collisions, Near Misses and Accidents are to be reported through the Notify IM app immediately.
- 1.11 All Incidents, Collisions, Near Misses and Accidents are to be reported directly to the client.
- 1.12 This method statement is to be read in conjunction with RAMS Appendix A (Standard Clauses)
- 1.13 RAMS Appendix A (Standard Clauses) is to be attached / sent along with this method statement.

Note Any deviation from these RAMS or any linked documents mentioned below, must be agreed with the QHSE Manager.

2 Training

2.1 TM Operatives working under this method statement must have undergone suitable training and competency assessments to satisfy the requirements of the nationally recognised standard.

2-Way phase Temporary Traffic Signals - NHSS 12D M1/M2 Working on Single Carriageways.

3 Vehicle

3.1 At a minimum, a traffic management maintenance/inspection or installation vehicle will be used in accordance with Chapter 8 Traffic Signs Manual.

- Conspicuous colour
- Reflective Markings (Chevrons on the rear of the vehicle)
- Roof mounted 360 beacon + rear strobe LED's
- "HIGHWAY MAINTENANCE" SIGN
- High visibility fluorescent yellow retroreflective strip alongside of the vehicle
- Company Livery
- Work lights
- Reverse Bleeper

3.2 A full digital check shall be carried out and recorded prior to leaving the yard, depot or at the shift changeover point. Any defects are to be reported accordingly.






3.3 The vehicles shall be loaded to ensure the equipment is secure and in such a manner so as to enable safe unloading in the correct order on site.




3.4 All drivers are to have driving licences checked on a regular basis (usually, every 6 months) prior to commencing any work, with a record being kept with the employee's HR Department and made available at request by main client.

3.5 All vehicles should carry a fire extinguisher for minor incidents. Major incidents would require the assistance of the fire service (contactable on 999 or 112 emergency calls only) other means of communication on site will be via a mobile phone, but, not during the installation of any TM equipment.

4 Personal Protective Equipment (PPE)

4.1 Minimum requirements on site for these RAMS for all personnel are:

Hard Hat	Eye Protection	Hi-Vis Clothing	Safety Gloves	Safety Boots
				
Colour dependent on role, with 4-point chin strap that meet EN397 & EN12 492 standards.	Safety glasses or goggles	Long sleeve Hi-Vis Jacket EN 20 471 class 3	Minimum of cut level F	(laced only) metatarsal if required by client / contractor

Head torch to be worn for night working and poor visibility	To be worn for task specific work or when required by client / site	Hi-Vis trousers EN ISO 20 471 class 1		S3 steel toe cap with ankle support
Black		White		Blue
				
SMSTS Managers and SSSTS Supervisors		General use, Managers, Clients and Competent Operatives		Trainee workers and Site visitors

Note The above PPE requirements apply to either Yellow or Orange (this could depend on Client’s requirements). PPE is to be clean, fit for purpose and identifiable with the company logo.

5 Unobstructed Widths

- 5.1 Adequate unobstructed road width is required to allow traffic to flow safely past the work site. Where such widths cannot be provided, appropriate traffic control must be considered.
- 5.2 The standard widths are designed to maintain access for buses and heavy goods vehicles and must be provided wherever practicable. Where this is not practicable, and where your risk assessment concludes that it is appropriate to do so, restricted lane widths are permissible.

Work Type	Standard Normal Traffic inc. Buses & HGVs	Restricted Cars & Light Vehicles Only
2-way working	6.75m minimum	5.5m minimum
Shuttle working	3.25–3.50 m desirable width range 3.0 m absolute minimum	3.25 m desirable minimum width 2.5 m absolute minimum

6 Safety Zones

Speed Limit mph		20	30	40	50	60
Longways clearance (m)	L	0.5	0.5	15	30	60
Sideways Safety Zone (m)	S	0.5	0.5	0.5	1.2	1.2

7 Lead In Taper

Type of Road	Width of Works Including Safety Zone	Lead In Taper						
		1m	2m	3m	4m	5m	6m	7m
Single Carriageway 30mph or less	Taper Length (m)	13	26	39	53	65	78	91
Single Carriageway 40mph or less	Taper Length (m)	20	40	60	80	100	120	140
Single Carriageway 50mph or more	Taper Length (m)	25	50	75	100	125	150	175

8 Pre-Works

8.1 Prior to leaving the depot the TM Operative(s) MUST ensure the following:

- They have the correct PPE to undertake the works in accordance with the Task Briefing and any client specific requirements.
- They have in their possession their relevant Lantra training record card.
- All the required documentation is available on the Field Service System for the works they are to undertake.
- They understand what is required of them through the Task Briefing, if in doubt they are to speak to their Supervisor/Manager.

Note Depending on the client’s requirements the TMO’s working on these works maybe required to attend a daily briefing.

- They understand RAMS and other associated documentation for the works.
- Completed, Vehicle Daily Walk around check.
- Kit is suitable for the works to be undertaken; defected kit is not to be used.

Note The TM Operative is to ensure that the local depot telephone number is clearly visible on the rear of the site signs.

- Kit that is required for the works is as per the traffic management plan and spares.
- Kit is securely loaded on to the vehicle; vehicle must not be overloaded.
- All traffic light batteries are fully charged.

9 Arriving On Site

9.1 On arriving on site, the TM Operative MUST

- Park your vehicle in a safe area
- Carry out the on-Site Risk Assessment using the Field Service System
- Take Pre installation Photos – from a safe location.

10 Install

- 10.1 Upon reaching the site switch on amber beacons, indicate and pull over to left hand verge, and stop at the position of first sign location.
- 10.2 Exit the vehicle from the near side and begin to install the road works ahead sign.



- 10.3 Place a minimum of 1no sandbag on to each sign to ensure the sign remains upright. (Additional bags to be added depending on sign size, speed of road and weather conditions).

Note Signs are too be positioned in such a way as not to reduce the minimum footway width to less than 1 metre, or block/restrict cycle lanes. Where minimum distances and a setback of 0.45m from the signs to the carriageway edge cannot be maintained, an alternative location for the sign must be sought. Signs may be placed on the carriageway or half on half off the footway where the carriageway width is not reduced below 6.75m for two-way traffic, and the minimum footway width is not restricted.


- 10.4 The TM Operative will proceed along the route towards the proposed site installing the Road Narrows sign. These signs may require count down supplementary plates on. This will be determined by the scheme design, road characteristics and road speed.



- 10.5 The TM Operative will drive through the works site and install the road works end sign.




- 10.6 Find a safe location to turn around and repeat the above operation on the opposite leg approaching the works area where required.

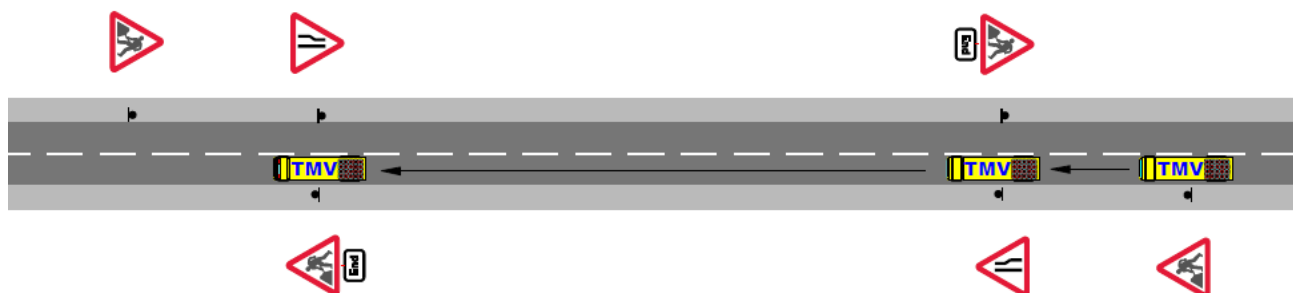


10.7 Once all approach signage is in place proceed with the flow of traffic and park the TM installation vehicle at the start of the works.

10.8 Exit the vehicle from the near side and proceed to remove cones from the TM installation vehicle and place on the nearside verge for the full length of the works including lead in and exit taper cones and signs.

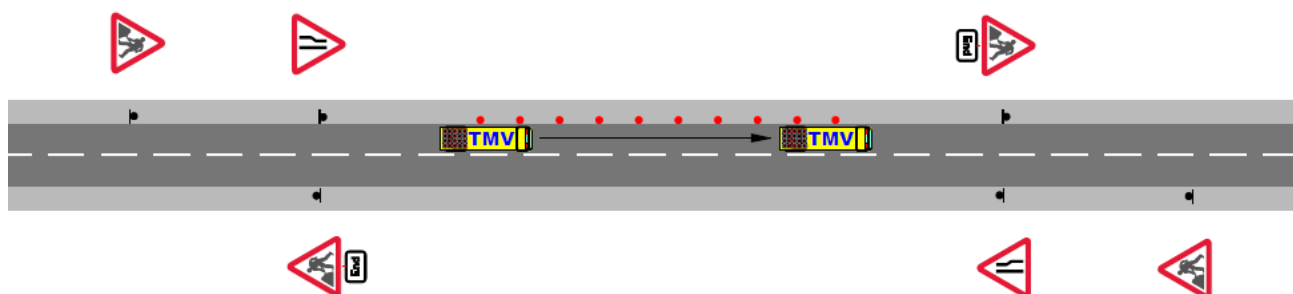


10.9 Once the coning detail is ready to be walked out, the TM Operative will install the lead in taper cones and 610 directional arrows. Lead in taper to be installed in accordance with the rate of taper calculation.

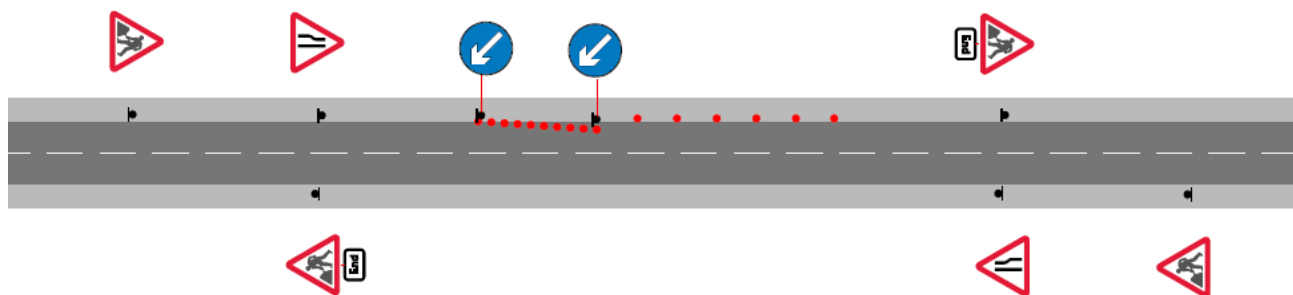


Note The lead in taper will be placed in accordance with the rate of taper calculation to the width of hazard including the lateral safety zone. The rate of taper ratio is as described in the inside rear cover of the Safety at Street Works and Road Works A Code of Practice 2013 2nd impression (with amendments), June 2014. The length of taper may need to change in urban conditions due road characteristics, speed limit and prevailing conditions. The site risk assessment must make note of any changes to the prescribed taper length and reasons for the reduction or changes.

10.10 Ensuring the TM installation vehicle is now in a safe location the TM Operative will walk out longitudinal coning from the nearside verge for the full length of the work up to the exit taper.

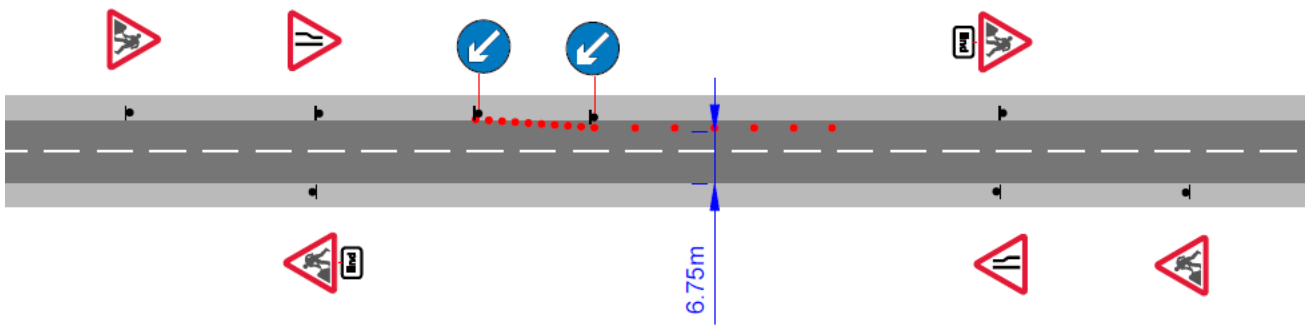


10.11 The TM Operative is to ensure that the unobstructed width of carriageway has not been reduced below the minimum required width for the carriageway once the coning detail is installed.

10.12 The TM Operative will then install the exit taper and 610 direction arrow.

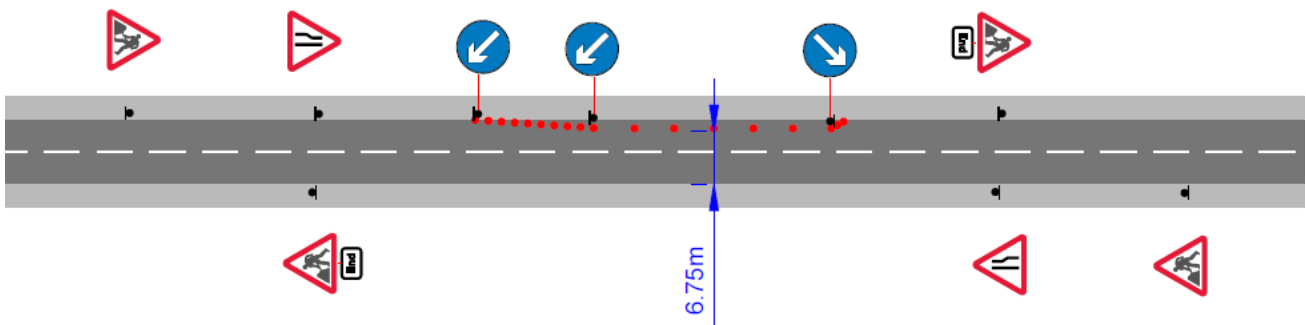


11 Removal


11.1 Once all works are complete the TM Operative will remove the exit taper cones and 610 directional arrow and place them on the nearside verge.

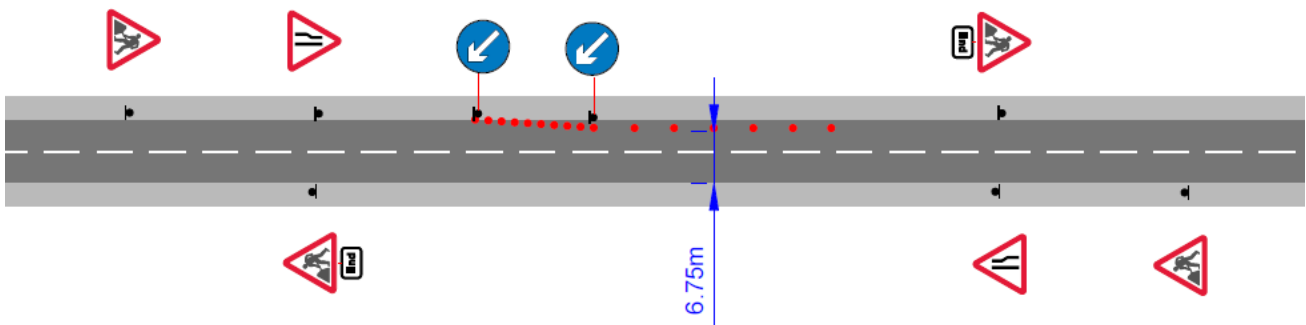

11.2 TM Operative will then proceed to remove the longitudinal cones to the nearside verge working against the flow of traffic.

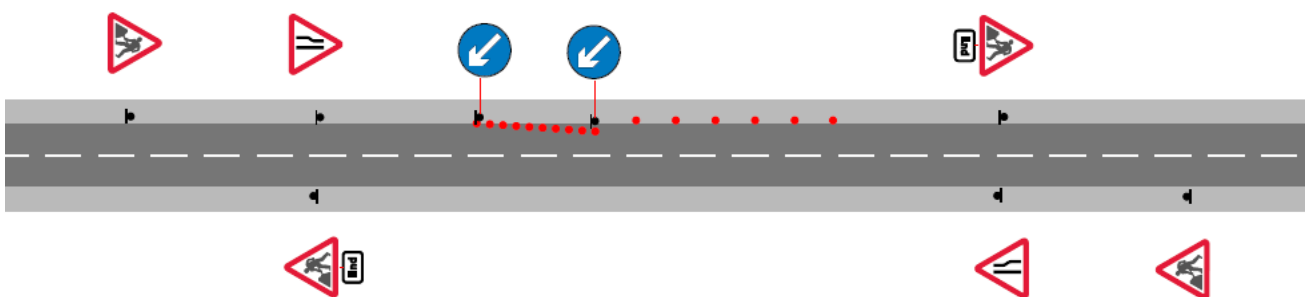


11.3 Upon reaching the lead in taper the TM Operative will remove all coning/signage to the nearside verge.

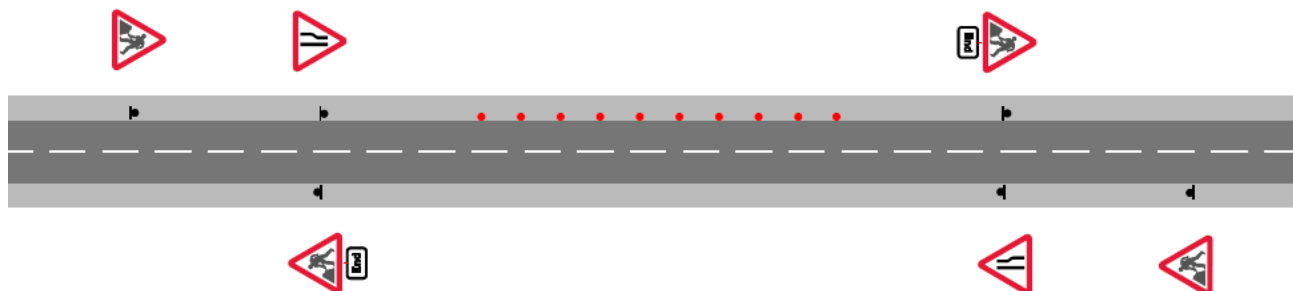


11.4 Proceeding with the flow of traffic find a safe place to turn around and proceed back to the works site.

11.5 Upon reaching the site switch on amber beacons, Indicate and pull over to left hand verge, and stop at position of first sign location.

11.6 Exit the vehicle from the near side and begin to remove the road works ahead sign. The TM Operative will then proceed along the route towards the proposed site removing the Traffic Road Narrows and the Road Works End sign.

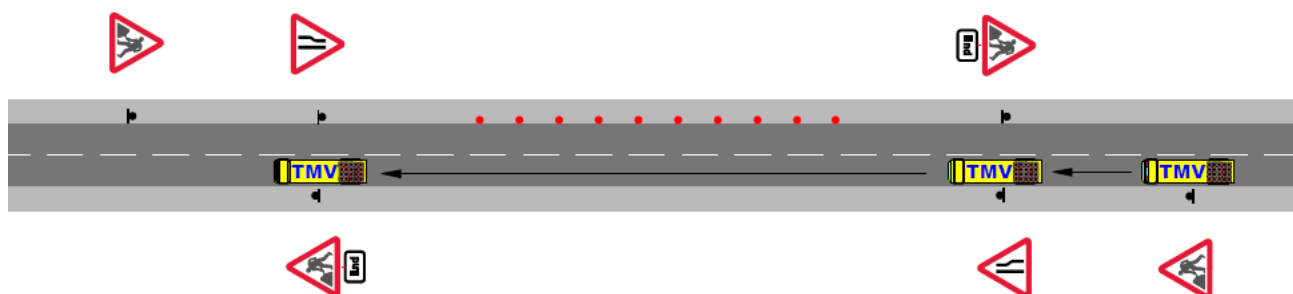

11.7 Find a safe location to turn around and repeat the above operation on the opposite leg approaching the works area.

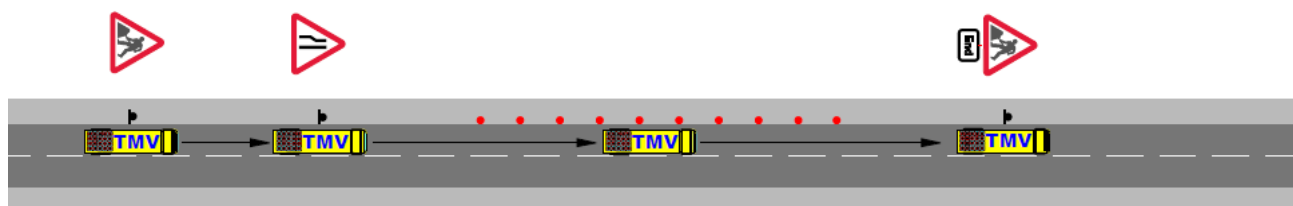

11.8 Traffic Cones/signage that was previously walked off to the verge will be picked up as works progress.

11.9 Take photos of the completed removal from a safe location.

Note It is a legal requirement that all equipment is to be removed from site.

12 Maintenance During the Works

12.1 A minimum of 3 daily site checks should be completed (Start, middle and end of shift) on fully attended sites to ensure compliance. This can be completed by the client (providing they have a competently trained operative) or by Hatton. This will be agreed at planning stage.

- 12.2 As a minimum, Hatton will always attend weekly and complete a thorough check.
- 12.3 Any equipment damaged will be replaced and documented and client made aware. Any displaced equipment will be stood up when operations allow.
- 12.4 Operatives must walk the length of the site visually checking and photographing sections of the site as directed on their field service tablet from a safe location.
- 12.5 All signs must be standing and appropriate to the scheme. Un-used signs should be removed from site and recorded on the maintenance job card.
- 12.6 All cones are to have clean and visible reflective sleeves fitted. Replace any damaged or excessively dirty cones.

13 Linked Documents

Document Name
Safety at Streetworks and Road Works Code of Practice (Red Book)
Guidance Note GS6 (Fourth edition) Avoiding danger from overhead power lines.
OF20-CEN Task Briefing Sheet
PY002-CEN Vehicle Policy
PY003-CEN Incident Reporting Policy
PR006-CEN Spillage Procedure
PY007-CEN Lone Working Policy
PY036-CEN Health & Well Being Policy
PY051-CEN Working at Height Policy
PY053-CEN Personal Protection Policy (PPE)
RA015-CEN Working Near Water
RAMS025- Works at or near a level crossing in place.
Traffic Signs Manual Chapter 8 Part 1 & Part 2 2009.
Traffic Signs Manual Chapter 8 Part 3 2016
TR001-DHB (Drivers Handbook)

Note All the above documents can be found on the field service tablets or on SharePoint

14 Risk Assessments

- 14.1 The following risk assessments are based on Generic TM 12D; the following operational hazards and risks provide a general indication of what may be encountered during normal TM works.
- Collision of plant or personnel with moving vehicles, highway traffic or work vehicles
 - Working at night
 - Manual handling
 - Lone working
 - Driving
 - Noise
 - Uneven ground (slips / trips / falls)
 - Violence / abuse from members of the public
 - Weather conditions & visibility
 - Road layout
 - Fatigue
- 14.2 The list is not exhaustive and operational personnel **MUST** carry out an on-site dynamic risk assessment. Risk assessment to be completed on the Field Service tablet before any sector scheme 12D work is undertaken.
- 14.3 If any risks, operational or environmental are identified when carrying out the on-site dynamic risk assessment, you **MUST** inform your supervisor immediately and prior to the deployment of traffic management equipment.
- 14.4 If at any point throughout your work, you encounter an unsafe situation you **MUST** stop work and contact your supervisor immediately for guidance.
- 14.5 The risk assessments **MUST** be communicated to all personnel undertaking any traffic management 12D works.
- If ANY risk is **HIGH**, do not proceed with the operation, abandon the job, or look at alternative delivery methods.
 - If ANY risk is **MEDIUM**, proceed only with caution, introduce additional control measures where possible.
 - If All risk is **LOW**, proceed with work.

14.6 Risk Scoring Methodology & Risk Assessments

Likelihood Categories		Severity Score				
Category	Description	1	2	3	4	5
1	Extremely Unlikely	1	2	3	4	5
2	Unlikely	2	4	6	8	10
3	Occasional	3	6	9	12	15
4	Likely	4	8	12	16	20
5	Expected	5	10	15	20	25
Severity Score Description						
1	Minor Injuries/inconveniences. Employee can continue to work - short term local damage					
2	Minor Injuries. Operative requires first aid treatment. Stops work - medium term local/short term regional damage.					
3	Reportable/LTI or illness - long term local/regional damage					
4	Major injury or illness with long term effects - long term widespread damage					
5	Fatalities - Widespread permanent damage					
Risk	Action Required					
Low	Check that no other risks can be eliminated by modifications of design then proceed with design. Record residual risks					
Medium	Reduce risks as far as reasonably practical. Consider alternative design or construction method. If alternatives are not available, specify precautions to be adopted. Record residual risks.					
High	Seek alternative solutions. If alternatives are not available, specify precautions to be adopted & advise Senior Management & Supervisor (if appropriate). Record residual risks					
Examples of Persons at Risk	Inexperienced					
	Vulnerable Road Users (VRU's) including Public, Cyclists, Horse riders.					
	Lone workers (LW)					
	Operative (OP) (TMO or/and Ganger)					
	Site Personnel (SP)					
All						

14.7 Risk Scoring Methodology & Risk Assessment Works Environmental

Category	Control	Severity Score				
Likelihood	Description	1	2	3	4	5
1	High degree of control	1	2	3	4	5
2	Medium degree of control	2	4	6	8	10
3	Moderate degree of control	3	6	9	12	15
4	Slight degree of control	4	8	12	16	20
5	Negligible degree of control	5	10	15	20	25
Severity Score Description						
1	All aspects fully controlled or have negative effect upon the environment					
2	Aspects exist at recognisable levels, which may impact on the environment; but any change is easily recoverable with no lasting effect					
3	Will have an effect on the environment - Damage is short term and is always recoverable					
4	Major Impact - Damage is not permanent, but may take some time to remedy					
5	High Impact - Risk of severe environmental damage					
Risk	Action Required					
Low	Low impact identified - Control measure to be adopted and monitored					
Medium	Medium impact identified - Ensure that the aspect & impact assessment is reviewed, further controls may be necessary					
High	High impact identified - Re-evaluate the aspect & impact assessment and develop / determine greater controls					
Examples of Receptor	Air (A)					
	Land (L)					
	Water (W)					
	Natural Resources (NR)					
	Community/Residence/Pedestrians (CRP)					
	Operative (O)					
	Ecology /Habitat (EH)					
	Carbon Footprint (CF)					
Key Environmental Issues						
Local effects of Pollution (air quality, noise, waste, lighting, odour)			Carbon emissions and greenhouse effect global warming			
Water source and ocean Pollution			Deforestation, soil erosion and land quality			
Material resources & Land despoliation, supply chain issues & inequal disruption to impacts			Energy Supplies, innovations in food and fuel			
			Agricultural issues arising from global trade			

Hazard(s)	At Risk	Risks	PRE-RCM Risk score (L x S)				Risk Control Measures	POST-RCM Risk score (L x S)			
			Likelihood	Severity	Risk Score	Risk Level		Likelihood	Severity	Risk Score	Risk Level
Inexperienced TM operatives implementing TTM	TMO/P/SP	Major Injury or long term health effect	5	4	20	H	<ul style="list-style-type: none"> a. Structured Induction and Site-Specific Training before being allowed to work b. Buddying system with experienced TMOs or Supervisors c. Daily briefings and toolbox talks with clear role allocation and expectations d. Active supervision and mentoring until competence is demonstrated e. Regular competency checks and feedback loops f. Clear stop work authority, ensuring they know they can speak up if unsure 	2	4	8	M
TM vehicles operating on public roads and sites	All	Not distinguishable to other motorists, risk of collision and fatal/serious injury	2	5	10	M	<ul style="list-style-type: none"> a. All TMIV's are marked and equipped as a minimum to the requirements of Traffic Signs Manual – Chapter 8: Part 2 Operations (2009) b. All TMIV's and TM vehicles are checked prior to their use daily to ensure that everything is in working order. 	1	5	5	L
TM vehicles operating on public roads and sites	All	TM vehicle pulling off carriageway or into works area and colliding with other vehicles	2	5	10	M	<ul style="list-style-type: none"> a. TMIV to use beacons, indicators and use relevant access/exit points. High visibility markings remain facing the flow of traffic. 	1	5	5	L

TM Vehicles	All	TM vehicle reversing and picking up TM equipment. Colliding with other vehicles, running over/crushing Operatives	5	4	20	H	<ul style="list-style-type: none"> a. TMO to check site is clear of other vehicles and any other site personnel/members of the public before commencing any reversing operations. b. Always use a banksman when on clients sites to reverse. c. Where available use reversing aids such as reversing cameras. 	2	4	8	M
TM Installation and Removal	TMO/SP	Signs falling on TMO(s)/public/SP	4	4	16	H	<ul style="list-style-type: none"> a. Set up as per method. b. Only TMO's with 12D sector scheme training to be used. c. PPE to be worn, clean and serviceable. as per PPE section d. Carry out TM works at times of reduced traffic flow. e. Use appropriate manual handling. f. Always work from the safe side and be vigilant of any road user. 	1	4	4	L
TM Installation and Removal Erecting signs	TMO/P/SP	Signs falling on TMO(s)/public	4	4	16	H	<ul style="list-style-type: none"> a. Erect signs on firm, level ground. b. Ensure adequate number of sandbags used to secure frame/sign. c. Ensure that signs are visible to the highway user and do not reduce the footway to less than 1 metre. d. Operatives trained in manual handling techniques. 	1	4	4	L
Contractor's staff straying into the safety zone or carriageway	SP	Serious injury to SP	2	5	10	M	<ul style="list-style-type: none"> a. Light continuous barrier or second row of traffic cones and safety Line will be placed adjacent to the working space to mark the inside edge of the sideways safety zone (S) and a traffic barrier after the longways safety zone (L) to prevent any possible straying or parking of vehicles/plant in these areas. 	1	5	5	L
Vehicle Strikes	TMO/SP	Serious injury to TMO & SP	4	4	16	H	<ul style="list-style-type: none"> a. Use of cones, Barriers and signage to be used. b. Set up as per Section 5, barrier Installation. c. Only TMO's with 12D sector scheme training to be used. d. PPE to be worn, clean and serviceable. as per PPE section 	1	4	4	L

Verbal abuse aggression from public	TMO	Stress, injury	4	4	16	H	<ul style="list-style-type: none"> a. Conflict management training. b. Clear signage to be used. c. TMO not to put themselves in danger, get into a conflict situation. d. TMO to return to their vehicle and lock the door e. Contact supervisor/police if needed f. Report and record all incidents through notify. g. Contact supervisor/police if needed 	2	4	8	M
Trips/slips and falls	TMO/SP	Sprains, bruising, head knocks	3	3	9	M	<ul style="list-style-type: none"> a. Keep area tidy at all times b. Store any unused TTM equipment on vehicle c. Avoid trailing equipment around access point(s) d. Use cones to mark hazards around near access points. e. PPE to be worn, clean and serviceable. as per PPE section f. Head torch is to be fitted to Hard hat and switched on at night or in inclement weather. g. Mobile lighting to be used when required h. Vehicle work lamps to be used when loading/unloading at night or in inclement weather. 	1	3	3	L
Weather exposure (heat, cold, rain)	TMO	Fatigue, dehydration, illness	3	2	6	M	<ul style="list-style-type: none"> a. Suitable clothing to be worn, PPE, waterproofs in wet weather. b. Shelter breaks c. Water breaks to be implemented in extreme heat. d. Sun cream to be applied to exposed skin in extreme heat. 	1	2	2	L
Manual handling of signage/barriers	TMO	Strain/injury	4	4	16	H	<ul style="list-style-type: none"> a. Team lifts where needed b. Use of mechanical aids (e.g., Tail lift, sack truck or trolley) c. Manual handling awareness undertaken d. Lightweight equipment to be used were possible 	1	4	4	L
Lifting SLG items (signs, cones, frames) by hand	TMO	Manual handling injuries (strain, sprain, back injury)	4	4	16	H	<ul style="list-style-type: none"> a. TMO carries out a full site risk assessment b. TMO not to proceed with work if site unsafe and report to supervisor. c. Manual handling training 	1	4	4	L

							<ul style="list-style-type: none"> d. Team lifting for heavy/bulky items e. Use of mechanical aids (e.g., Tail lift, sack truck or trolley) f. Plan load layout in advance to minimise handling 				
Loading on uneven or unstable ground (site)	TMO	Slips, trips, falls	4	4	16	H	<ul style="list-style-type: none"> a. Pre-check ground stability b. Maintain clear access and egress c. Use suitable footwear with good grip as per PPE requirements S3 Standard with laces fastened up fully. 	1	4	4	L
Lifting above shoulder height onto flatbed	TMO	Musculoskeletal injuries, falling items	4	4	16	H	<ul style="list-style-type: none"> a. Hard Hat to be worn and fastened up. b. Use drop-down tailgates or steps c. Use two-person lift or mechanical hoist if available d. Store heavier items lower on vehicle 	1	4	4	L
Poor visibility during loading (early morning/night)	TMO	Trips, vehicle collisions	4	4	16	H	<ul style="list-style-type: none"> a. Adequate task lighting, vehicle lights, work lights on rear of vehicle. b. Wear Hi-Vis PPE c. Site lighting in depot d. Position vehicle in well-lit area 	1	4	4	L
Traffic movement during site loading	TMO	Hit by vehicle	4	4	16	H	<ul style="list-style-type: none"> a. Temporary Traffic Management in place b. Use of Lookout/Signaller/2ndTMO c. Exclusion zones around loading areas to be used where required d. Vehicle beacons and hazard lights to be switched on when outside the works area 	1	4	4	L
Unsecured items during transit	TMO P	Falling load during transit	3	1	3	L	<ul style="list-style-type: none"> a. Use of vehicle-specific securing systems (straps, ratchets) b. Regular checks during journey, retighten straps when required c. Use a Load configuration plan 	1	1	1	L
Poor visibility/night work	TMO/SP	Reduced safety, increased accident risk	2	4	8	M	<ul style="list-style-type: none"> a. Use of reflective clothing b. Illuminated signage c. Adequate lighting 	1	4	4	L

Fatigue (long hours, low alertness)	TMO	Reduced concentration, increased error risk	2	3	6	M	<ul style="list-style-type: none"> a. Adequate breaks b. Rotate duties c. Fit-for-work checks d. Avoid excessive overtime e. Reporting of fatigue to supervisor 	1	2	2	L
Reinstating moved traffic management equipment	TMO	Struck by vehicle, manual handling injury	4	4	16	H	<ul style="list-style-type: none"> a. Conduct task during low traffic flow b. Use buddy system c. Wear full PPE d. Follow safe manual handling practices e. Use IPV 	1	4	4	L
Environmental Risk assessment											
Use Of Vehicle – CO2, SOx, NOx and particulates emissions	A/CRP/O	Air Pollution – Green House gases = Global Warming and Climate Change	2	3	6	M	<ul style="list-style-type: none"> a. Driver Behaviour Monitored, Speeding, Cornering, harsh braking and vehicle idling b. Euro VI vehicles used c. CO2, NOx & PM monitored and reported to Senior Management d. Driving assessments carried out at induction. e. Vehicle policy in place f. Drivers’ handbook in place g. TBTs, Alerts and Memos given to Drivers h. Vehicle serviced and maintained regularly i. Vehicles renewed on a 3 yearly cycle 	1	3	3	L
Use Of Vehicle – Use of fossil fuels (natural resources)	NR	Material resources & Land despoliation, supply chain issues & inequal disruption to impacts	2	3	6	M	<ul style="list-style-type: none"> a. TBTs, Alerts and Memos given to Drivers. b. Vehicle serviced and maintained regularly. c. Vehicles renewed on a 3 yearly cycle. d. FORS Silver accreditation in place e. 14001 Accreditation in place. f. Fuel, MPG, Ltrs mileage reports reviewed by Senior Management 	1	3	3	L

Refuelling of Vehicle/Plant - Use of fossil fuels (natural resources)	W/L/H	Water source and ocean Pollution, Deforestation, soil erosion and land quality & Biodiversity loss	2	3	6	M	<ul style="list-style-type: none"> a. Vehicles are filled up in a controlled environment. b. TBT given regarding Spillages/pollution c. Weekly walk around checks are carried out by the DM's 	1	3	3	L
Vehicle Plant Maintenance - Use of fossil fuels (natural resources) Emissions to land or water from spillage of fuel or oil	L/W/NR/EH	Water source and ocean Pollution, Deforestation, soil erosion and land quality & Biodiversity loss. Material resources & Land despoliation, supply chain issues & inequal disruption to impacts	2	3	6	M	<ul style="list-style-type: none"> a. Supplier of the vehicle carries out the maintenance and not on our sites. b. Minor top ups carried out on vehicle and plant, Jugs and funnels used c. Servicing's dates are monitored by the TAF at each depot to ensure the vehicles/plant is serviced on time 	1	3	3	L
Disposal of Waste - Failure to follow waste hierarchy Failure to comply with Duty of Care Avoidance of disposal of waste	All	Local effects of Pollution (air quality, noise, waste, lighting, odour) Water source and ocean Pollution, Waste and International waste trade Deforestation, soil erosion and land quality, Biodiversity loss	2	3	6	M	<ul style="list-style-type: none"> a. Waste is collected from site and brought back to the depot to dispose of within the waste receptacles. b. A Contractor GoGreen manages waste. c. Reports are generated by the QHSE Manager and reported on at the Senior Management QHSE meetings d. Weekly walk around checks are carried out within the depots to ensure waste is in the correct areas 	1	3	3	L
PPE - Use of fossil fuels (natural resources)	NR	Material resources & Land despoliation, supply chain issues & inequal disruption to impacts	2	1	2	L	<ul style="list-style-type: none"> a. PPE controlled and supplied b. Stock off PPE kept c. New PPE is swapped for old and recycled through the supplier where it is reused. 	1	1	1	L
Site Works –	CRP/EH	Local effects of Pollution (noise)	2	1	2	L	<ul style="list-style-type: none"> a. TM Vehicles have silent night reversing Bleepers fitted. 	1	1	1	L

Noise generation							<ul style="list-style-type: none"> b. TM Operative not to communicate by shouting, radios to be used. c. Vehicle sound systems levels to be low. d. Vehicle horns not to be activated in a built-up area between the hours of 11.30 pm and 7.00 am except when another road user poses a danger. 				
Site Works – Obtrusive Lighting	CRP/EH	Local effects of Pollution (lighting)	2	1	2	L	<ul style="list-style-type: none"> a. Lighting is only used for short periods of time when laying out a site. b. Head torches are used at night-time and point in the direction of travel. c. TM vehicle head lights are used for traveling only. d. TM Vehicle work lights are used for loading unloading only and not to be left on. e. TM hazard beacons are only used for warning others of stopping to set up a sight or leaving a site. 	1	1	1	L